

## 2W UI30/5.5 FAUI3005 SERIES



### FEATURES

Frequency 50/60Hz  
 Potted under vacuum  
 Split-bobbin  
 Temperature class ta 70°C/B  
 Weight: 0.115kg  
 Packaging unit: 15 pieces [tray]  
 Fixing material for 2.5mm [0.098 inch]  
 Self-tapping screws: DIN 7513 [M 3x8]  
 Sheet-metal screws: DIN 7971 [2.9x6.5]


### OPTIONS

Bulk packaging is standard  
 Custom design available

### COMMON APPLICATIONS

Medical equipments  
 Industrial equipments  
 Industrial controls  
 Test equipments  
 Industrial computers  
 Avionics & telecom


### PHYSICAL CHARACTERISTICS

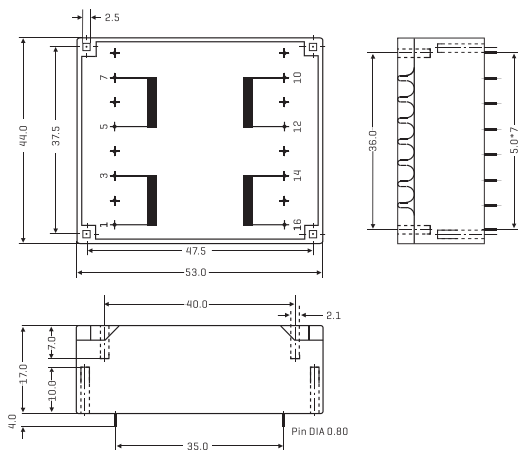

### ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)
FAUI300507	2*115	2*6/166	2*10.2
FAUI300508	2*115	2*9/111	2*15.3
FAUI300509	2*115	2*12/83	2*20.4
FAUI300510	2*115	2*15/66	2*25.5
FAUI300511	2*115	2*18/55	2*30.6
FAUI300512	2*115	2*24/42	2*40.8

### TECHNICAL INFORMATION

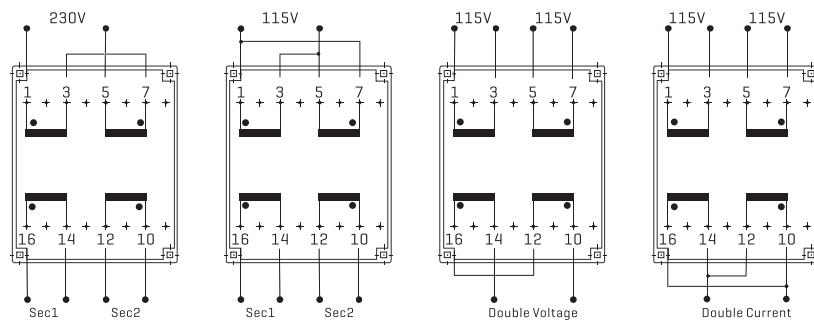

ALL DIMENSIONS IN MM

# 3W UI30/5.5 FAUI3005 SERIES



## FEATURES

- Frequency 50/60Hz
- Potted under vacuum
- Split-bobbin
- Temperature class ta 50°C/B
- Weight: 0.115kg
- Packaging unit: 15 pieces [tray]
- Fixing material for 2.5mm [0.098 inch]
- Self-tapping screws: DIN 7513 [M 3x8]
- Sheet-metal screws: DIN 7971 [2.9x6.5]


## OPTIONS

- Bulk packaging is standard
- Custom design available

## COMMON APPLICATIONS

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom


## PHYSICAL CHARACTERISTICS

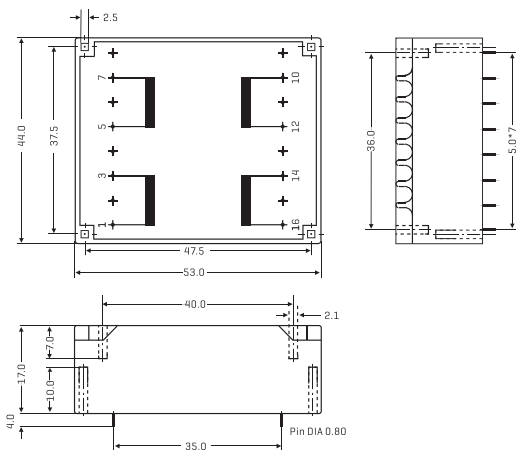

## ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI300513	2*115	2*6/250	2* 9.8
FAUI300514	2*115	2*9/167	2*14.7
FAUI300515	2*115	2*12/125	2*19.6
FAUI300516	2*115	2*15/100	2*24.5
FAUI300517	2*115	2*18/83	2*29.5
FAUI300518	2*115	2*24/63	2*39.3

## TECHNICAL INFORMATION

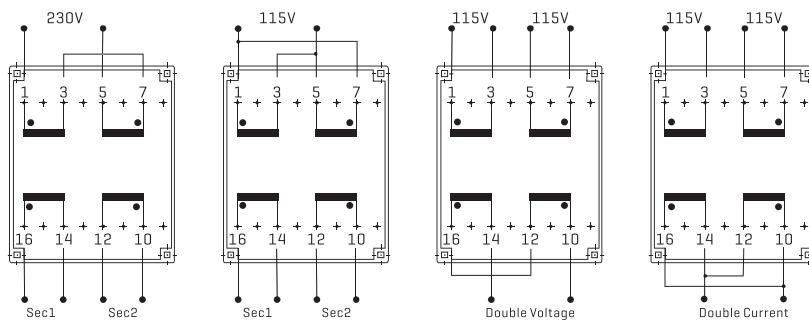

ALL DIMENSIONS IN MM