


DBE-1F SERIES, 1WATT, 3KVDC, UNREGULATED

FEATURES:

- ✓ 3000Vdc isolation voltage
- ✓ Compact size
- ✓ Operating temperature range -40°C to +85°C
- ✓ 3 year warranty



Model	Input voltage (Vdc)	Output voltage (Vdc)	Output current (mA)		Efficiency Typ.
			Min.	Max.	
DBE1-0310F	3.3(2.97~3.63)	3.3	30	300	76%
DBE1-0311F		5	20	200	77%
DBE1-0510F	5(4.5~5.5)	3.3	30	300	76%
DBE1-0511F		5	20	200	80%
DBE1-0512F		9	11	110	81%
DBE1-0513F		12	8.3	83	77%
DBE1-0514F		15	6.8	68	79%
DBE1-0515F		24	4.2	42	78%
DBE1-1210F	12(10.8~13.2)	3.3	30	300	77%
DBE1-1211F		5	20	200	79%
DBE1-1212F		9	11	110	79%
DBE1-1213F		12	8.3	83	81%
DBE1-1214F		15	6.8	68	82%
DBE1-1215F		24	4.2	42	78%
DBE1-1511F	15(13.5~16.5)	5	20	200	70%
DBE1-1514F		15	6.8	68	78%
DBE1-2410F	24(21.6~26.4)	3.3	30	300	74%
DBE1-2411F		5	20	200	70%
DBE1-2412F		9	11	110	77%
DBE1-2413F		12	8.3	83	80%
DBE1-2414F		15	6.8	68	78%
DBE1-2415F		24	4.2	42	80%

Notes: 1. other input and output models may available on request;

2. Add suffix "P" for short circuit protection.


DBE-1F SERIES, 1WATT, 3KVDC, UNREGULATED

ELECTRICAL

Output voltage accuracy	---	±5% max.
Line regulation	---	± 1.5% max.
Load regulation	10% ~ 100% full load	15% max.
Switching frequency	---	100KHz typ.
Ripple and noise	---	100mVp-p max.
Isolation voltage	---	3000Vdc
Short circuit protection	---	1S
Operating temperature range	---	-40°C to +85°C
Storage temperature range	5%~95%, non-condensing	-55°C to +125°C
Temperature coefficient	---	±0.03%/°C
MTBF	MIL-HDBK-217F@25°C	3500KHrs
Weight	---	1.3g

Notes: All the parameters are measured at 25°C ambient temperature, humidity < 75%, nominal input voltage, full load and after warm-up, unless otherwise specified.

MECHANICAL

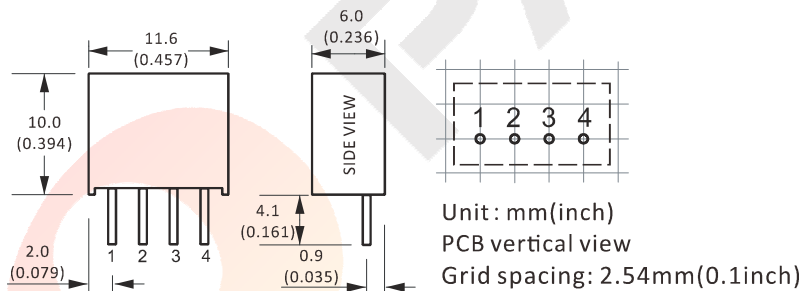


CONNECTION


PIN #	SINGLE
1	GND
2	+Vin
3	0V
4	+Vo

Note:

* Unit is mm(inch).

TEMPERATURE PROFILE

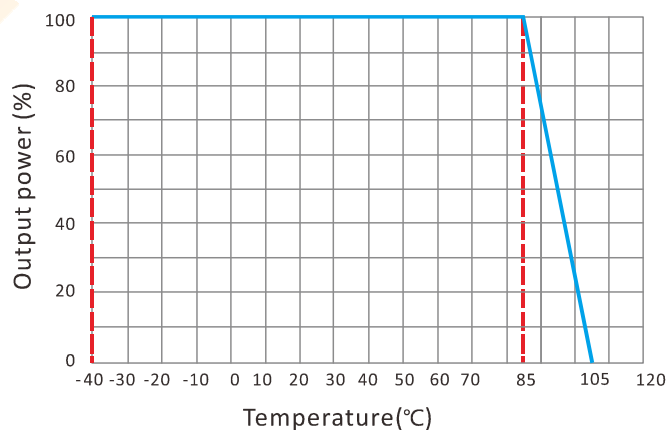

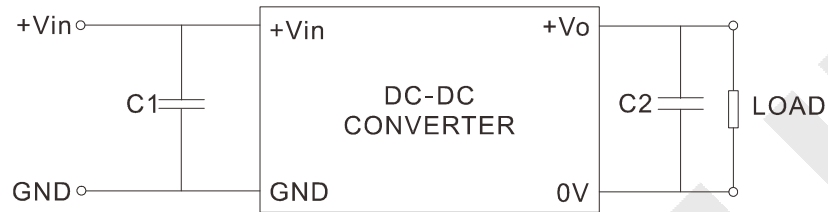DBE-1F SERIES, 1WATT, 3KVDC, UNREGULATED
NOTES
RECOMMENDED TEST AND APPLICATION CIRCUIT

CAPACITOR SELECTION

INPUT VOLTAGE	C1	OUTPUT VOLTAGE	C2
3.3VDC	4.7 μ F	3.3VDC	10 μ F
5VDC	4.7 μ F	5VDC	10 μ F
12VDC	2.2 μ F	9VDC	4.7 μ F
15VDC	2.2 μ F	12VDC	2.2 μ F
24VDC	1.0 μ F	15VDC	1.0 μ F
--	--	24VDC	0.47 μ F