


SPECIFICATION FOR APPROVAL

Material

| | |
|----------------------------|---------------------------|
| Production: | Super Sendust Cores |
| FUAN.P/N: | KS300-060A-HF |
| AL: | 68(nH/N ²)±8% |
| Material: | 60 μ |
| Coating Color: | Black |
| Coating material: | epoxy |
| Coating Breakdown Voltage: | 1500V, 0.5mA, 2Sec |

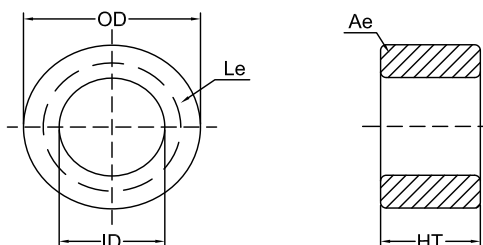


Physical Characteristics

| Before Coating | | | After Coating | | | Le(cm) | Ae(cm ²) | V(cm ³) | W(cm ²) | Weight (g) (ref.) | Box Quantity (Pieces) |
|----------------|----------------|----------------|---------------|-------------|-------------|--------|----------------------|---------------------|---------------------|-------------------|-----------------------|
| OD(Max.) in/mm | ID(Min.) in/mm | Ht(Max.) in/mm | OD(Max.) mm | ID(Min.) mm | Ht(Max.) mm | | | | | | |
| 3.063 77.80 | 1.937 49.20 | 0.500 12.70 | 78.90 | 48.20 | 13.84 | 20.000 | 1.770 | 34.700 | 18.237 | 230.1 | 54 |


Electrical Parameters(Typical) Temperature(25°C±2°C)

| Test Item | Test Condition | Value(Typical) | Test Instrument |
|------------|---|------------------------------|-----------------|
| Inductance | φ0.80mm/106Ts, 20kHz/1V, I=0A (Evenly full windings) | 764.0μH±8% | CH3302 |
| DC-Bias | φ0.80mm/106Ts, 20kHz/1V, I=15A(H=100Oe) (Evenly full windings) | 428.8μH(Min.) | WK3255B+WK3265B |
| Core Loss | 50kHz/1000Gs | 370mW/cm ³ (Max.) | SY-8219 |
| Remarks | Set the internal resistance of LCR meter to 100Ω. | | |

Core Loss Curves(Typical)

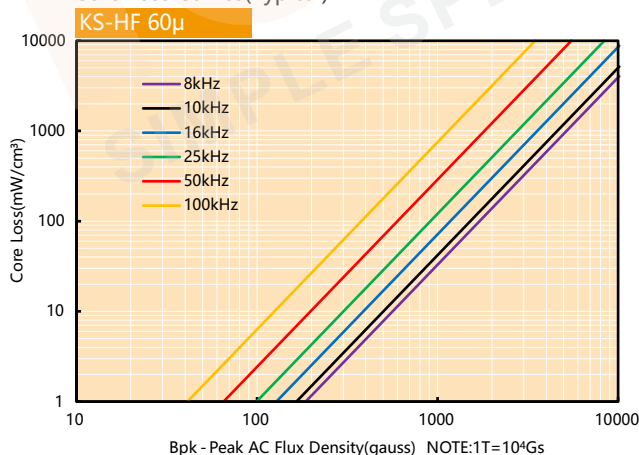

DC-Bias Curves(Typical)

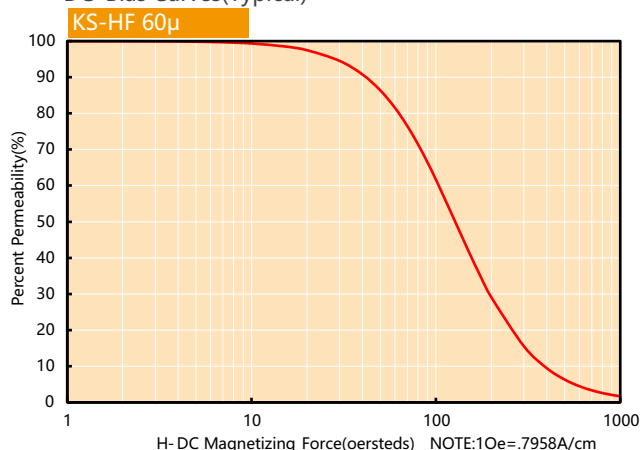

Super Sendust Cores (KS-HF Series) is a new type of magnetic material which has good DC bias characteristics close to Si-Fe cores with core losses similar to Sendust Cores. High permeability KS-HF cores (75-125μ) will be an economic solution for applications which require high permeability such as low power switching power supply, server power, automotive, solar power. KS-HF cores with low permeability (26-60μ) are applied to various large current applications which lower losses and excellent DC bias characteristics are critical. They are applied to various applications such as UPS, power Inverter, industrial power.