

U-TYPE SHUNT

FASEC SERIES




FEATURES

- Excellent Long Term Stability
- Temperature Coefficient $\leq 50\text{ppm}/^\circ\text{C}$
- Comply With RoHS Standards
- Special Specifications Can Be Customized
- Electron Beam Welding, Stable Performance
- High Overload Capacity
- Resistance Values Down to $0.1\sim 0.3\text{m}\Omega$
- AEC-Q200 Test

APPLICATIONS

- Frequency Converters
- Power Modules
- Uninterrupted Power Supply
- Current Sensor for Power Hybrid Applications
- Welding Equipment
- Electronic Battery Management
- High Current Applications For the Automotive Market
- Automatic Control Power Supply

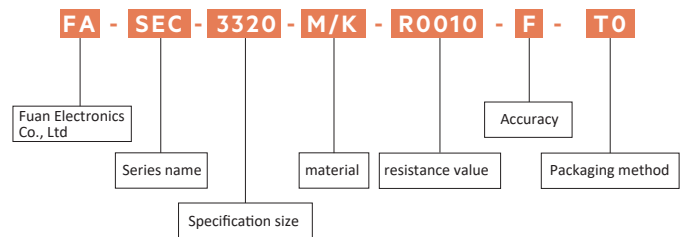


ELECTRICAL CHARACTERISTICS FORM

Part Number	Power	Resistance	Accuracy
FASEC-3420-M/K	3~5W	1 mΩ	1%,5%,10%
FASEC-3320-M/K	3~5W	0.3~5 mΩ	1%,5%,10%

Product datasheet

ELECTRICAL INFORMATION

Dimension in mm

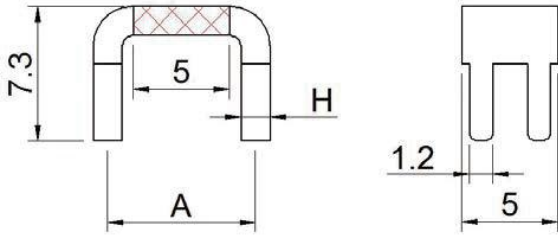

Item	A±0.2	H±0.2	Standard Package
FASEC-3420	8.2	0.9	1700PCS/REEL
FASEC-3320	7.7	1.5	1700PCS/REEL

Derating Curve Resistance Change VS Temperature

