


## SPECIFICATION FOR APPROVAL

### Material

Production:	Iron Powder Cores
FUAN.P/N:	KT400-2/90
AL:	18.0(nH/N <sup>2</sup> )(0~+15%)
Material:	-2/90
Coating Color:	Red/Clear
Coating material:	epoxy
Coating Breakdown Voltage:	800V, 0.5mA, 2Sec

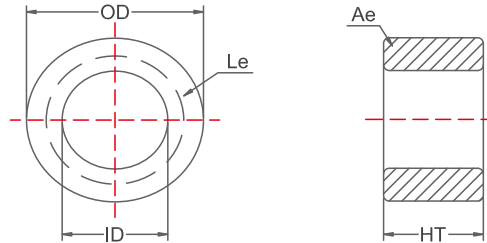


### Physical Characteristics

After Coating			Le(cm)	Ae(cm <sup>2</sup> )	V(cm <sup>3</sup> )	W(cm <sup>2</sup> )	Weight (g) (ref.)	Box Quantity (Pieces)
OD mm	ID mm	Ht mm						
102.0±0.95	57.2±0.95	16.5±0.95	25.000	3.460	86.400	2.137	440.64	30


### Electrical Parameters(Typical)      Temperature(25°C±2°C)

Test Item	Test Condition	Value(Typical)	Test Instrument
Inductance	φ0.29mm/20Ts, 10kHz/1V, I=0A (Evenly full windings)	7.2μH(0~+15%)	CH3302
DC-Bias	φ0.50mm/100Ts,10kHz/1V,L(10.0A)/L(0A)*100%(H=50Oe) (Evenly full windings)	90%(Min.)	WK3255B+WK3265B
Q	φ0.50mm/100Ts, 200kHz/1V, I=0A (Evenly full windings)	15.0(Min.)	CH3302
Remarks	Set the internal resistance of LCR meter to 100Ω.		

DC-Bias Curves(Typical)

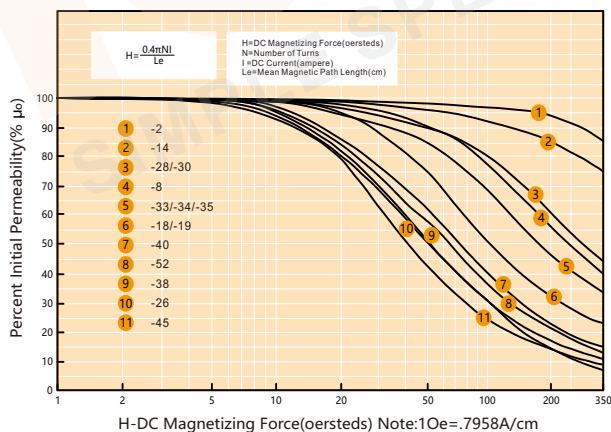

Core Loss Curves(Typical)

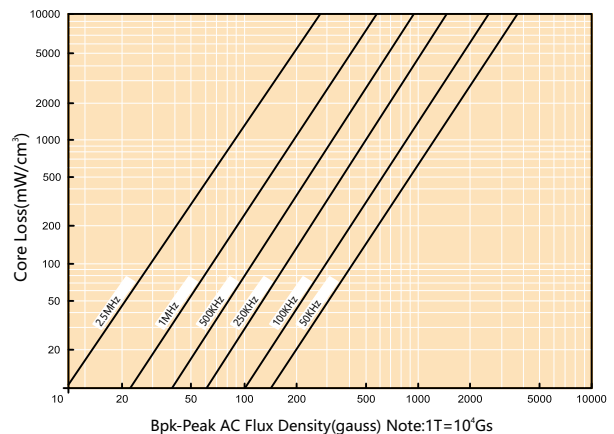

Iron Powder Cores is a magnetic core which use traditional production arts, after the pure powder which content of Fe is more than 99% surface insulation coating and then mixed pressed with organic binder. Because it hasn't been conducted in the high temperature, so it's used temperature is -65C ~ +125C. Products including permeability 10ui-100ui, toroid, E type,